




» NEUMANN.BERLIN

- » KK 104 U
- » KK 105 U

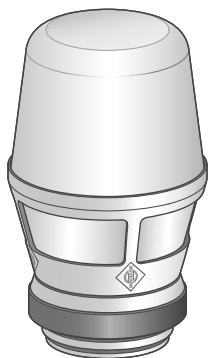

KK 104 U



KK 105 U



Instruction manual | Bedienungsanleitung | Notice d'emploi |
 Istruzioni per l'uso | Instrucciones de manejo | Manual de instruções |
 Gebruiksaanwijzing | Instrukcja obsługi | Bruksanvisning |
 Betjeningsvejledning | Käyttöohje | Οδηγίες λειτουργίας | Kullanım kılavuzu |
 Инструкция по эксплуатации | 使用说明书 | 取扱説明書 | 사용 설명서 |

www.neumann.com | KK 104 U | KK 105 U



Quick Guide
 Kurzanleitung
 Guide rapide
 Guida rapida
 Guia de inicio rápido
 Pikaohje
 Γρήγορος οδηγός
 Kısa Kılavuz
 Краткая инструкция



Guia rápido
 Beknopte handleiding
 Krótka instrukcja obsługi
 Snabbguide
 Kort vejledning
 快速指南
 クイックガイド
 퀵 가이드

PUBL. 11/23 · 597259/A01

Specifications	KK 104 U	KK 105 U
Directional pattern	Cardioid	Supercardioid
Frequency range	40 Hz - 20 kHz	40 Hz - 20 kHz
Sensitivity at 1 kHz into 50 kΩ ¹⁾	4.8 mV/Pa \cong -46.3 dBV \pm 1 dB	4 mV/Pa \cong -48 dBV \pm 1 dB
Signal-to-noise ratio, CCIR ²⁾ (rel. 94 dB SPL)	62 dB	62 dB
Signal-to-noise ratio, A-weighted ²⁾ (rel. 94 dB SPL)	74 dB	73 dB
Equivalent noise level, CCIR ²⁾	32 dB	32 dB
Equivalent noise level, A-weighted ²⁾	20 dB-A	21 dB-A
Maximum SPL for THD \leq 0.5% ³⁾	150 dB	152 dB
Weight	approx. 177 g	approx. 183 g
Dimensions (diameter / length)	\varnothing 48 mm / 80 mm	\varnothing 48 mm / 80 mm
Operating temperature range	0 °C - +70 °C (32 °F - 158 °F)	0 °C - +70 °C (32 °F - 158 °F)
Storage temperature range	-20 °C - +70 °C (-4 °F - 158 °F)	-20 °C - +70 °C (-4 °F - 158 °F)
Humidity range	max. 90 % at +20 °C	max. 90 % at +20 °C

¹⁾ all values for supply voltage 5V and load impedance \geq 50 kΩ ²⁾ according to IEC 60268-1; CCIR-weighting according to CCIR 468-3, quasi peak; A-weighting according to IEC 61672-1, RMS ³⁾ measured as equivalent el. input signal

KK 104 U

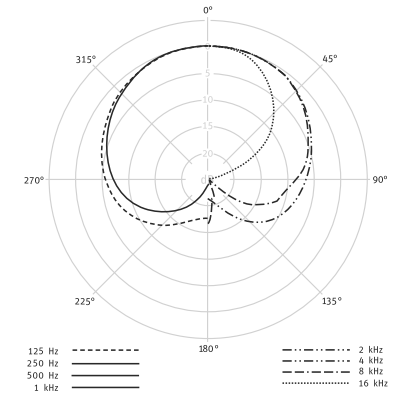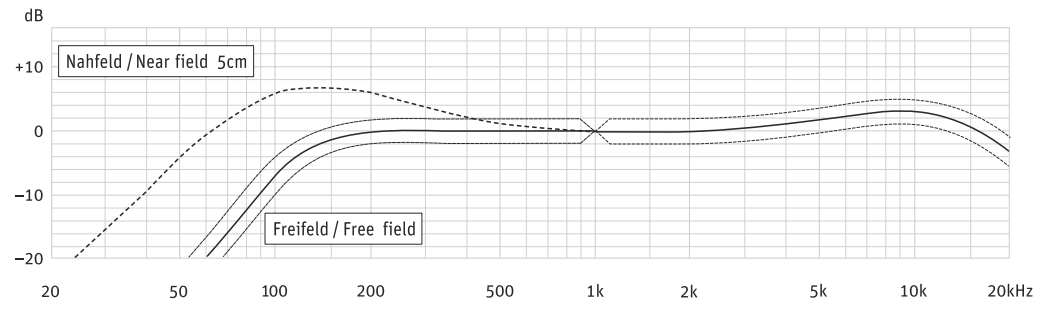

KK 105 U

