



SENNHEISER

# Headmic 4

Model: Headmic 4  
Headmic black  
Headmic beige  
Headmic silver



Quick Guide  
Kurzanleitung  
Guide de démarrage rapide  
Guía rápida  
Instrucciones resumidas  
Instruções resumidas  
Beknopte gebruiksaanwijzing  
Krótka instrukcja obsługi  
Snabbguide  
Kort vejledning  
Pikaohje  
Σύντομες οδηγίες  
Kısa Kılavuz  
Краткая инструкция  
快速指南  
快速使用指南  
クイックガイド  
요약 안내서

Sennheiser electronic GmbH & Co. KG





Am Labor 1, 30900 Wedemark, Germany  
www.sennheiser.com

Printed in Germany, Publ. 09/23, 592826 /A01




## In the box

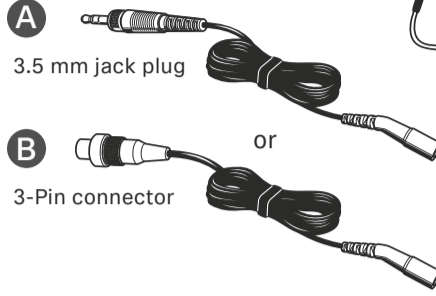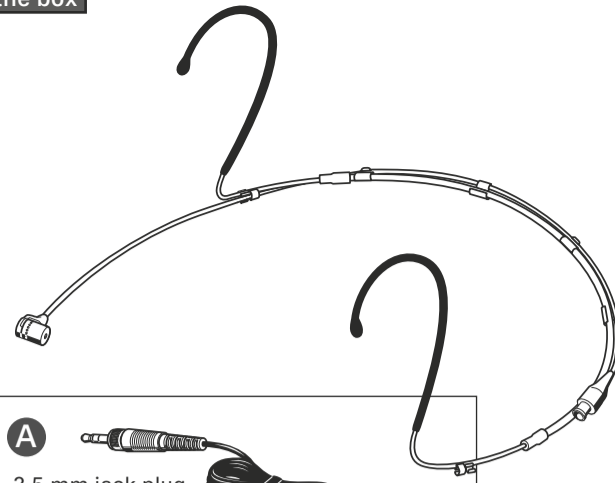




## Setup

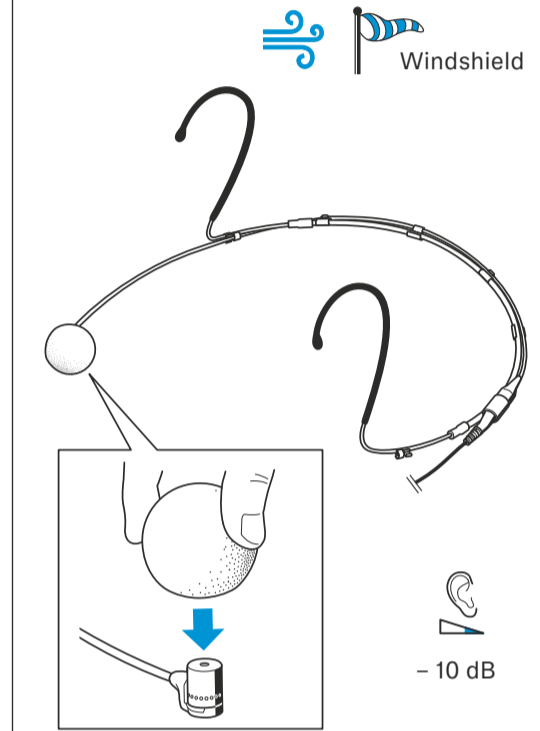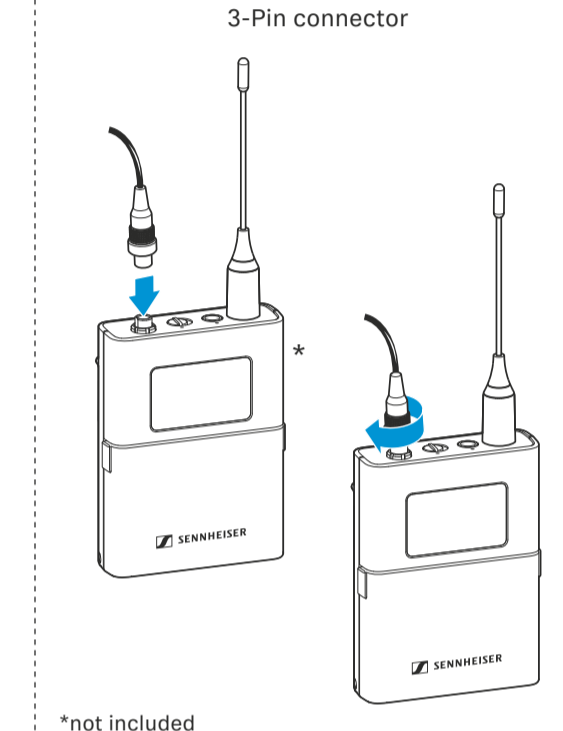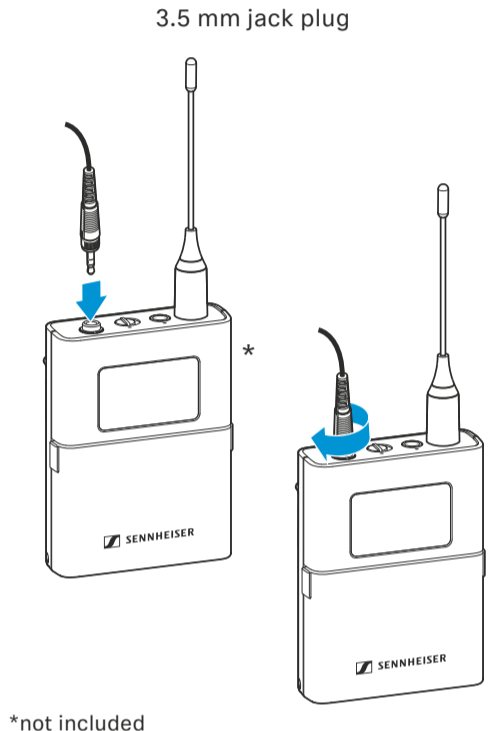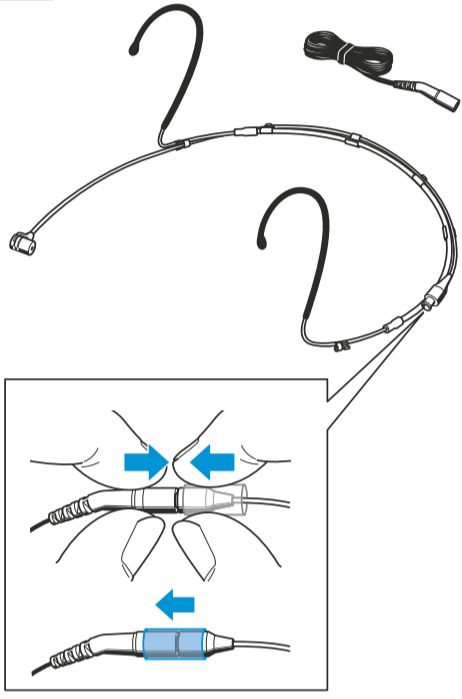


## Wearing

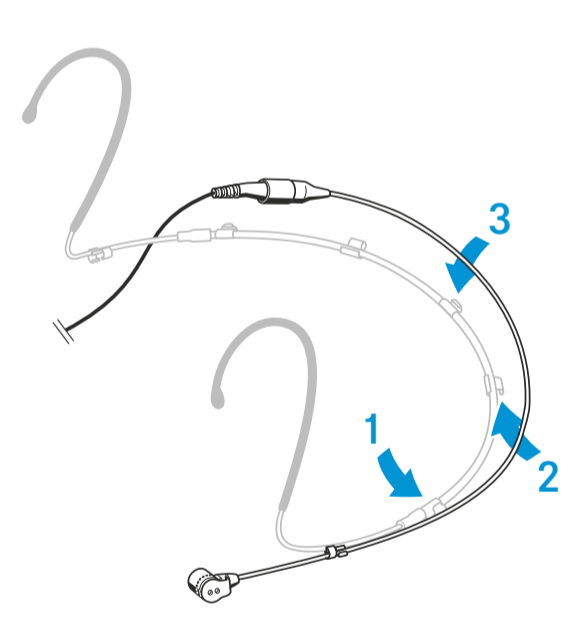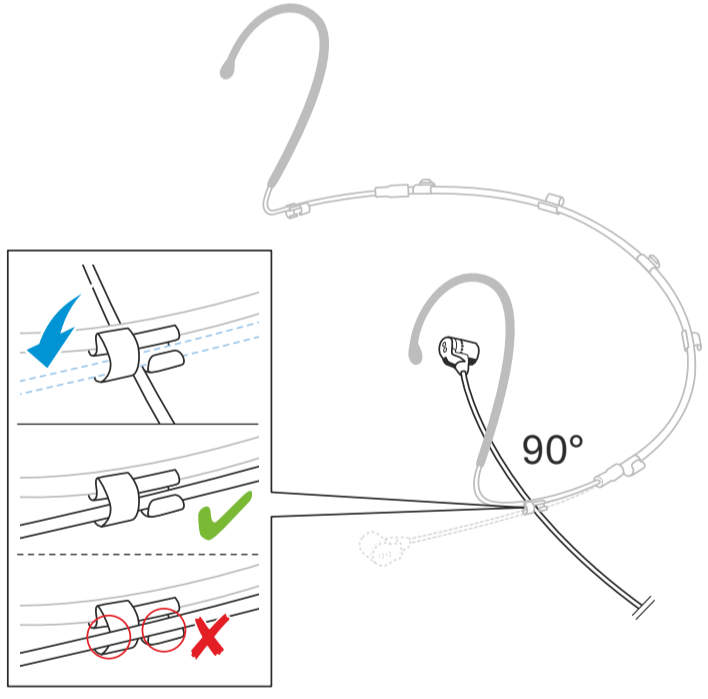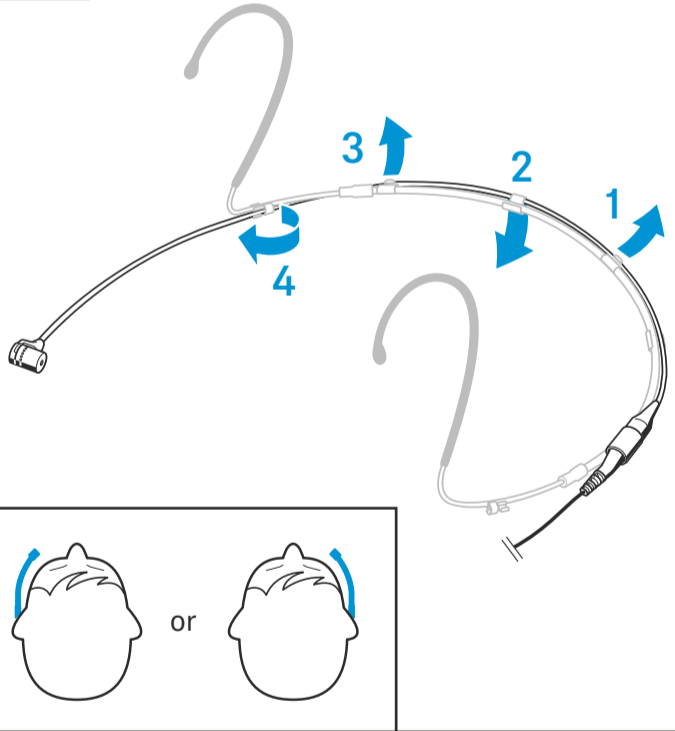

## Adjusting

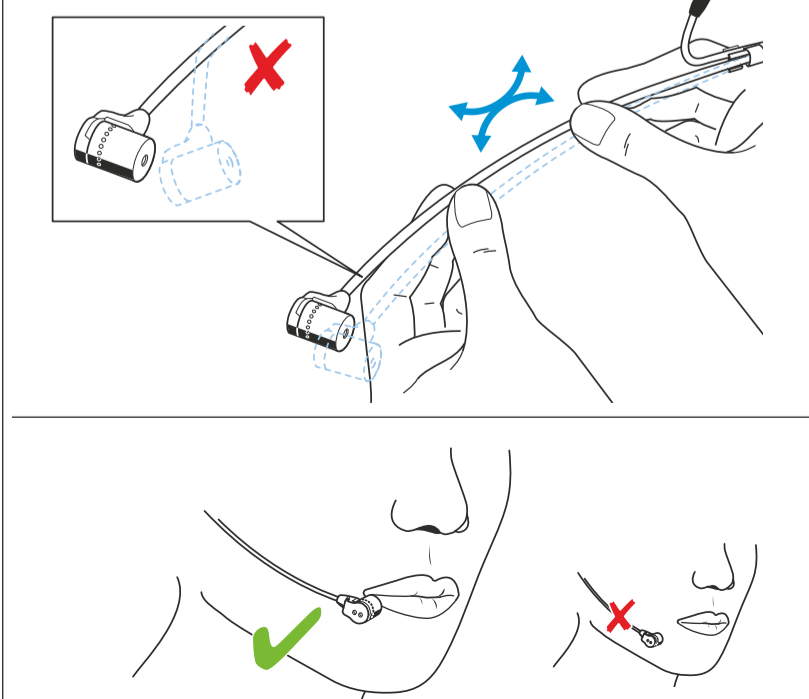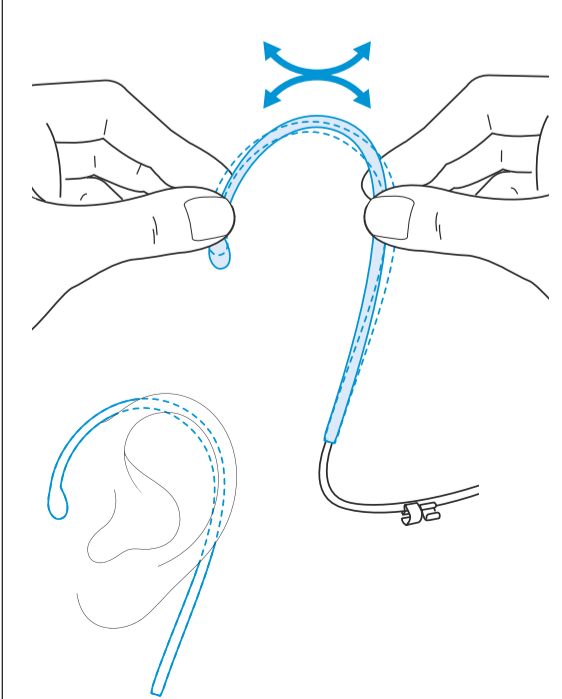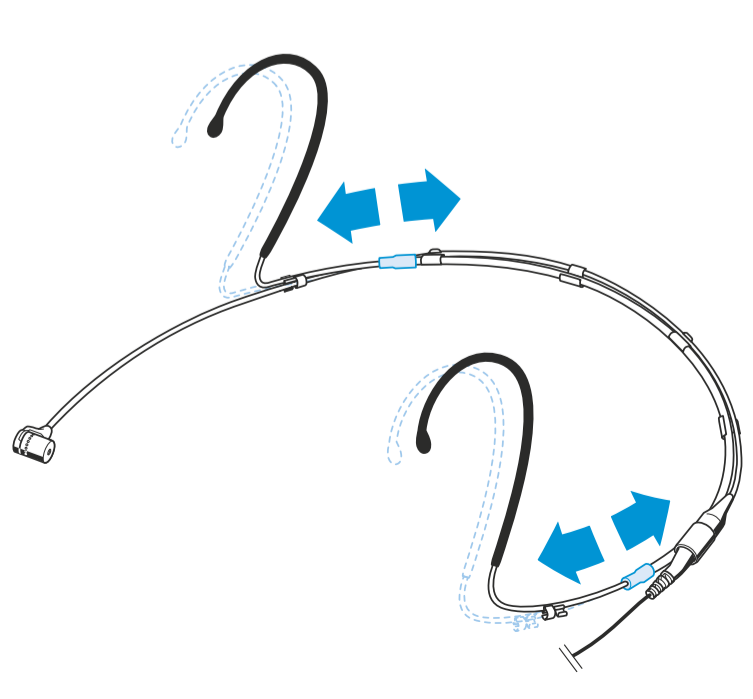


**Accessory**

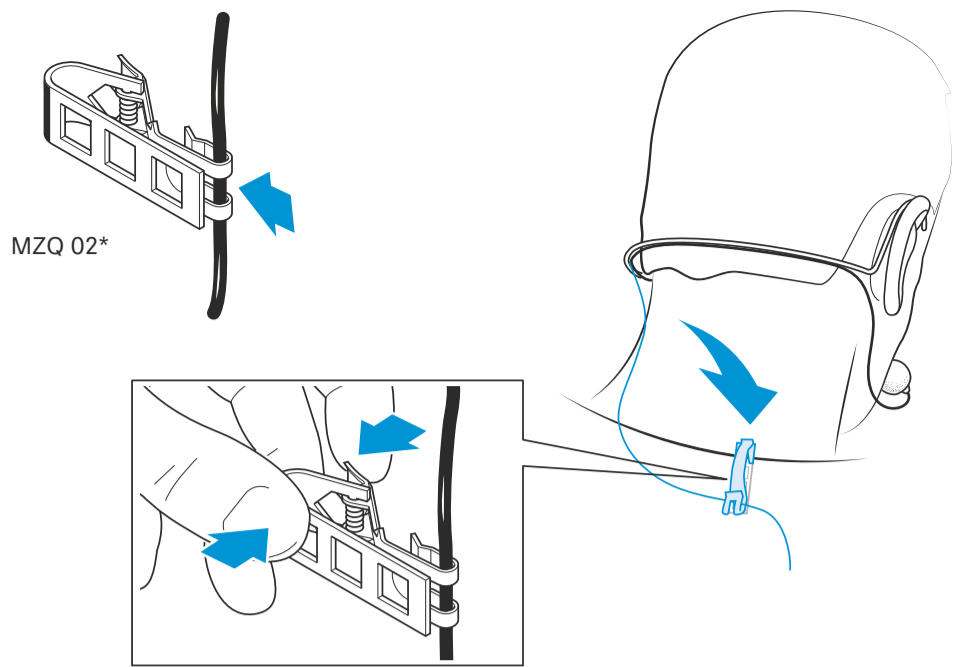



MZQ 02\*

\*not included

**Storing and transporting**

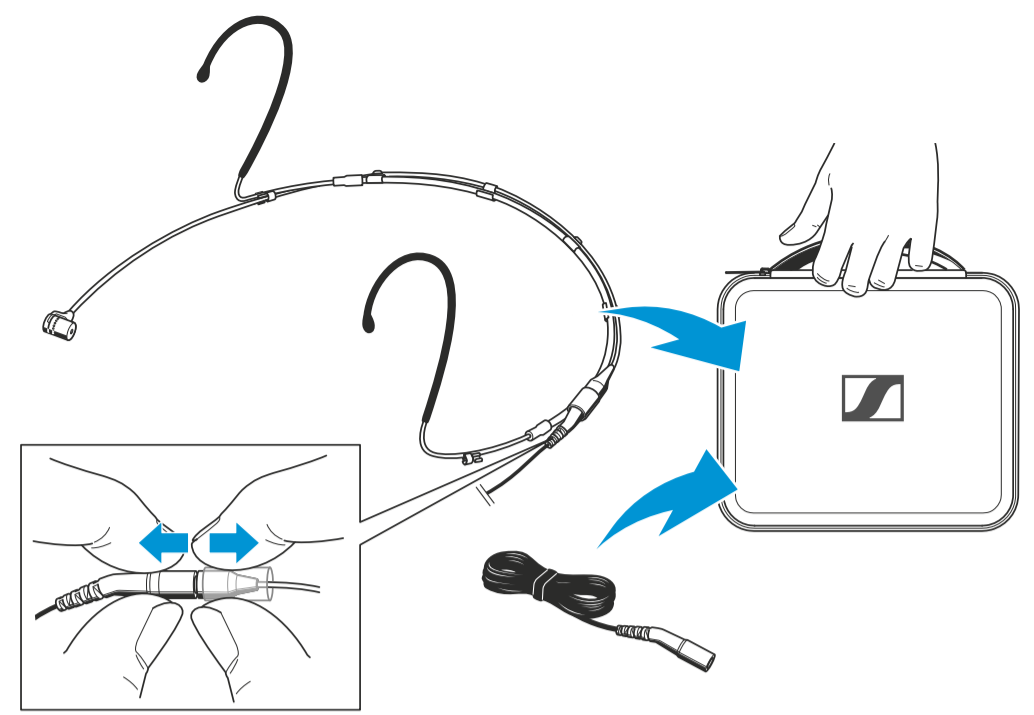


**Cleaning**

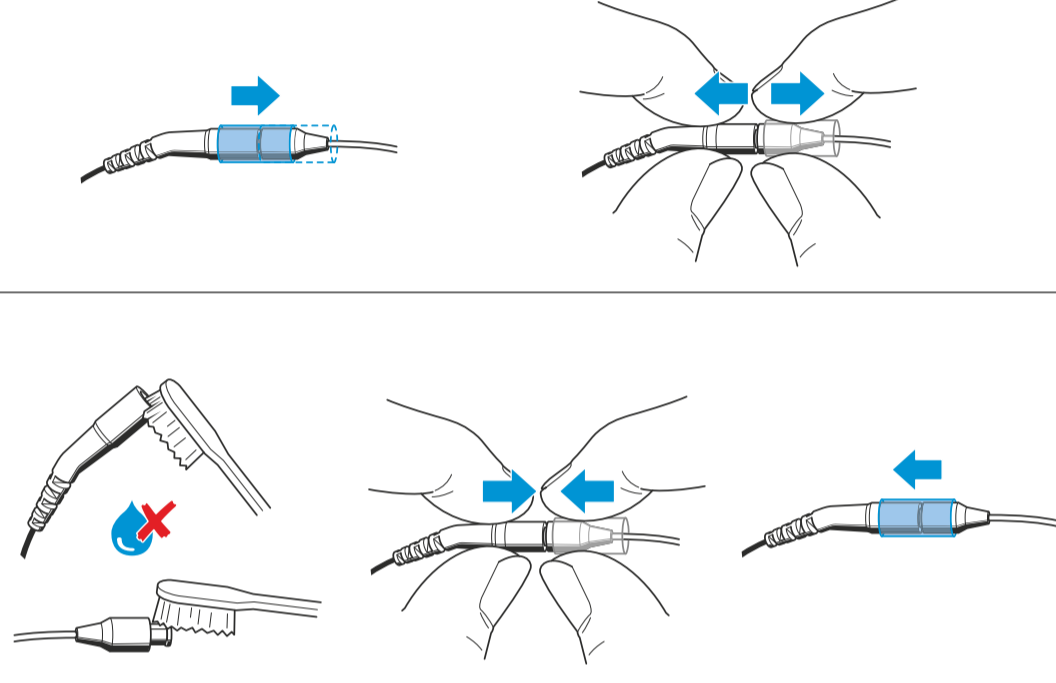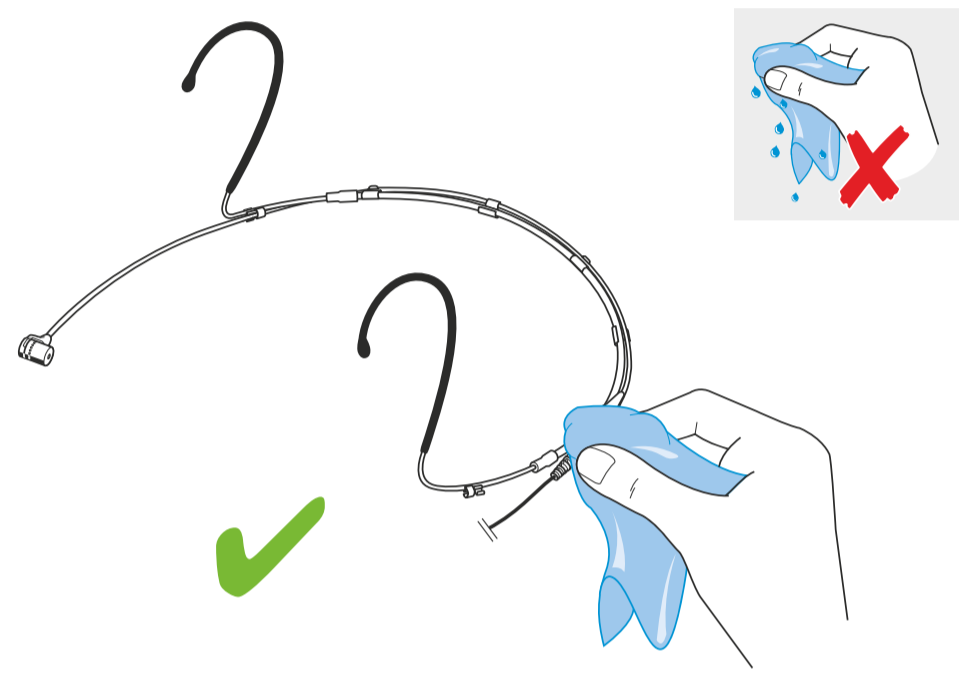

**Specifications**

Frequency response	20 - 20,000 Hz ±2.5 dB
Pick-up pattern	cardioid
Nominal impedance	1.2 kΩ
Min. terminating impedance	4.7 kΩ
Sensitivity	8 mV/Pa ±2.5 dB
Diameter of mic capsule	4.7 mm
Max. sound pressure level	143 dB
Equivalent noise level	30 dB(A)
Supply current	approx. 240 µA
Power supply	4.5 - 15 V
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +70 °C
Relative humidity	max. 90 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight (without cable)	7 g
Connector	3.5 mm jack plug or 3-Pin connector

**Polar pattern**

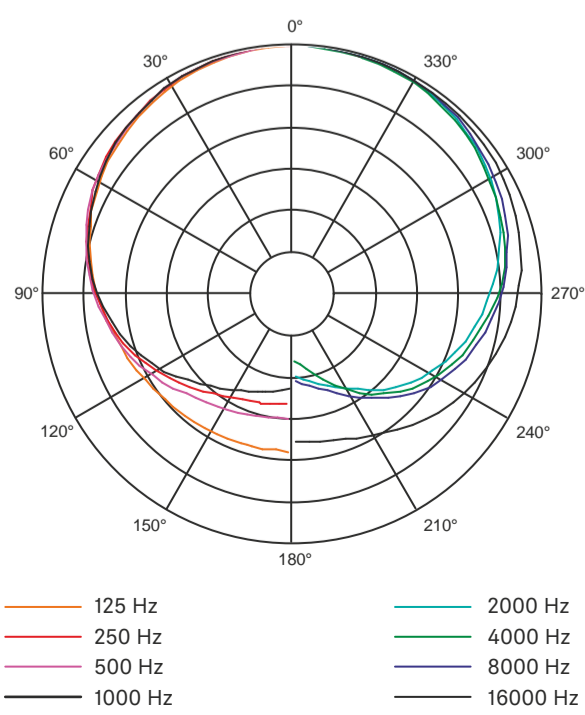

**Frequency response**

